

LAÇO PREFORMADO LATERAL SIMPLES

AMARRA FIJA LATERAL SIDE TIE

Uso e Aplicação


Material indicado para amarre do condutor lateralmente ao pescoço do isolador de pino. Acompanha um coxim de elastômero que deve ser aplicado no cabo na parte que fica em contato com o isolador para protegê-lo contra danos de abrasão.

Uso y Aplicación

Material indicado para amarre de los conductores lateralmente al cuello del aislador de tope. Acompaña un manguito amortiguador que debe ser aplicado en el cable en la parte que hace contacto con el aislador para protegerlo contra daños de abrasión.

General Recommendations

Material designed to secure conductors in the side groove of interchangeable headstyle insulators. A tie tube component is furnished with the tie and should be applied over the conductor.

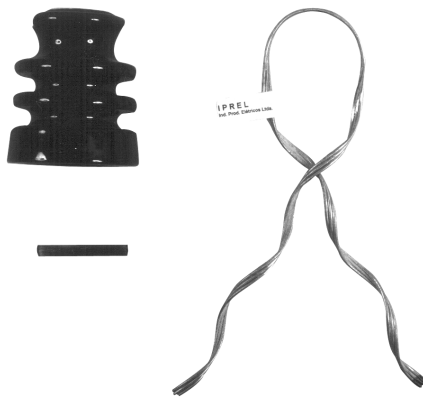

Pesçoço do Isolador 75mm/Cuello del aislador 75mm/Insulator neck 2-7/8"

CATAL. código	Intervalo de Aplic. Rango Aplicación		Diameter Range		Cabo/Cable/Conductor Size (awg/mcm)			Marca Ident Isol	Comprim (max)		Cód. Cor
	Rango Aplicación (mm)		Range (inches)		CAA	CA	CAL	Marca Ident Insul	Largo (max)	Color	
number	min	max	min	max	ACSR	AAC	AAAC	Insul Ident Mark	Lenght (max) (mm) (inches)	Color Code	
ISTF-0150	4,82	5,47	.190	.215	6 - 6/1	—	—	amarelo/amarillo/yellow	406 16	azul/azul/blue	
ISTF-0151	5,48	6,21	.216	.244	—	4 - 7 f/h/w	—	amarelo/amarillo/yellow	432 17	marrom/marron/brown	
ISTF-0152	6,22	7,05	.245	.277	4 - 6/1, 7/1	—	4 - 7 f/h/w	amarelo/amarillo/yellow	483 19	laranja/naranja/orange	
ISTF-0153	7,06	8,01	.278	.315	3 - 6/1	2 - 7 f/h/w	3 - 7 f/h/w	amarelo/amarillo/yellow	533 21	púrpura/rosa/purple	
ISTF-0154	8,02	9,08	.316	.357	2 - 6/1, 7/1	—	2 - 7 f/h/w	amarelo/amarillo/yellow	610 24	vermelho/rojo/red	
ISTF-0155	9,09	10,30	.358	.405	1/0 - 6/1	1/0 - 7 f/h/w	1/0 - 7 f/h/w	amarelo/amarillo/yellow	660 26	amarelo/amarillo/yellow	
ISTF-0156	10,31	11,67	.406	.459	2/0 - 6/1	2/0 - 7 f/h/w	2/0 - 7 f/h/w	amarelo/amarillo/yellow	711 28	azul/azul/blue	
ISTF-0157	11,68	13,22	.460	.520	3/0 - 6/1	3/0 - 7 f/h/w	3/0 - 7 f/h/w	amarelo/amarillo/yellow	762 30	laranja/naranja/orange	
ISTF-0158	13,23	14,95	.521	.588	4/0 - 6/1	4/0 - 7 f/h/w	4/0 - 7 f/h/w	amarelo/amarillo/yellow	813 32	vermelho/rojo/red	
ISTF-0159	14,96	16,90	.589	.665	266.8-18/1 266.8-26/7	266.8-37 f/h/w 300-19 f/h/w 336.4-19 f/h/w	—	amarelo/amarillo/yellow	584 23	púrpura/rosa/purple	
ISTF-0160	16,91	19,19	.666	.755	300 - 30/7 336.4-18/1,30/7 397.5-18/1	397.5-19 f/h/w	—	amarelo/amarillo/yellow	635 25	marrom/marron/brown	
ISTF-0161	19,20	21,72	.756	.855	477-18/1,24/7 477-26/7	477-19,37 f/h/w	—	amarelo/amarillo/yellow	660 26	vermelho/rojo/red	
ISTF-0162	21,74	24,59	.856	.968	556.5-24/7 636-18/1	700-37,61 f/h/w	—	amarelo/amarillo/yellow	711 28	azul/azul/blue	

Encordoamento à direita

Encordonamiento a la derecha

Right-hand lay standard